



stand-alone assembly support for
3RU21/3RB30/3RB31/3RR2 Size S0 Stand-alone
installation Main circuit: Screw Auxiliary circuit: --

General technical data		
Product brand name		SIRIUS
Product designation		individual mount
Size of overload relay		S0
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70
Installation/ mounting/ dimensions		
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	45
Height	mm	97
Depth	mm	87
Connections/ Terminals		
Type of electrical connection		
• for main current circuit		screw-type terminals
•		

— Type of connectable conductor cross-sections for main contacts finely stranded

— with core end processing

- Type of connectable conductor cross-sections at AWG conductors

— for main contacts

1 ... 6 mm²

1x (16 ... 8)

Certificates/ approvals

General Product Approval



[Miscellaneous](#)

Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Shipping Approval

Shipping Approval

other



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2926-3AA01>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2926-3AA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2926-3AA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2926-3AA01&lang=en

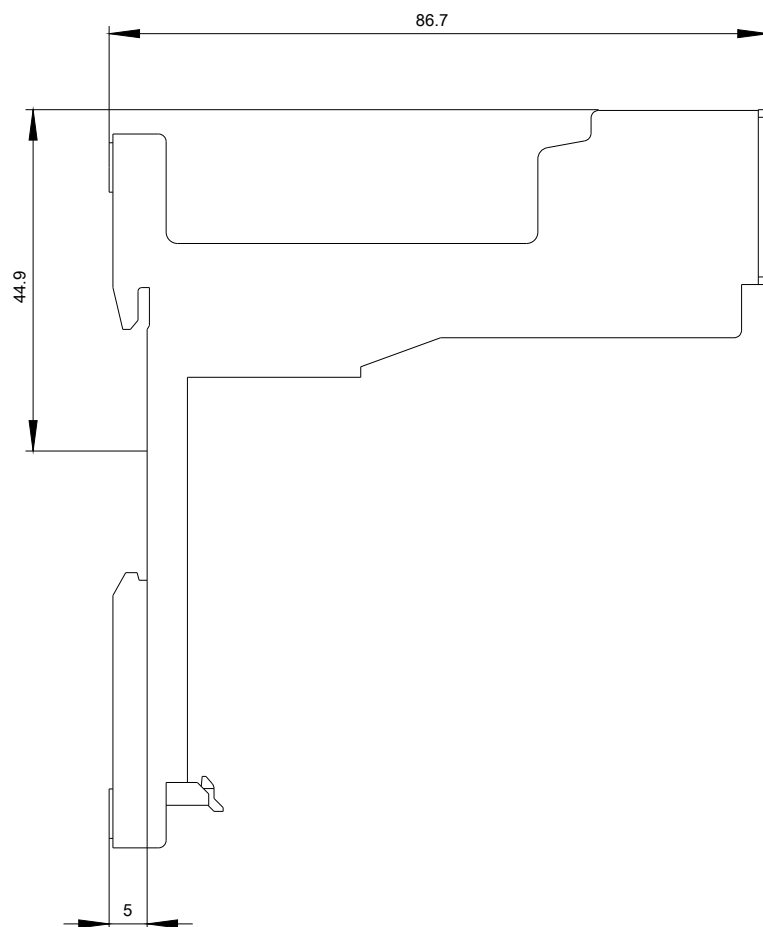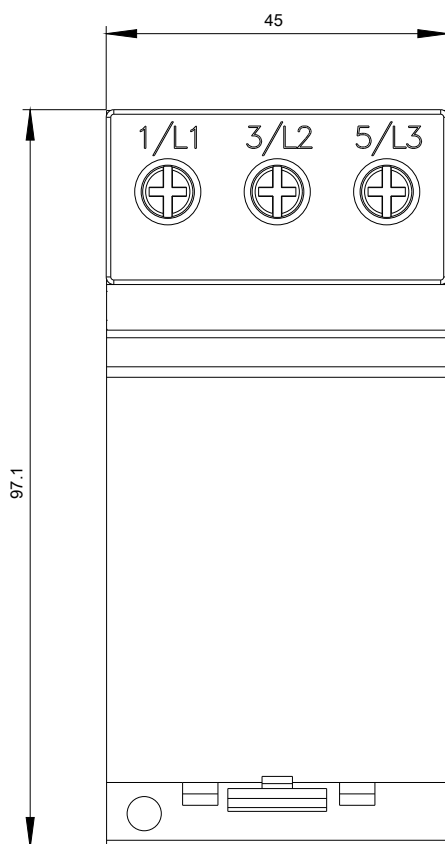

1/L1

3/L2

5/L3

last modified:

03/20/2020