



stand-alone assembly support for
3RU21/3RB30/3RB31/3RR2 Size S00 Stand-alone
installation Main circuit: Screw Auxiliary circuit: --

General technical data		
Product brand name		SIRIUS
Product designation		individual mount
Size of overload relay		S00
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70
Installation/ mounting/ dimensions		
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	45
Height	mm	89
Depth	mm	75
Connections/ Terminals		
Type of electrical connection		
• for main current circuit		screw-type terminals
•		

— Type of connectable conductor cross-sections for main contacts finely stranded

— with core end processing

- Type of connectable conductor cross-sections at AWG conductors

— for main contacts

0.5 ... 2.5 mm²

1x (20 ... 12)

Certificates/ approvals

General Product Approval



EG-Konf.

[Miscellaneous](#)

Test Certificates

[Type Test Certificates/Test Report](#)

Test Certificates

[Special Test Certificate](#)



ABS



BUREAU VERITAS



LRS



PRS



RINA

Shipping Approval

Shipping Approval

other



RMRS

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2916-3AA01>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2916-3AA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2916-3AA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2916-3AA01&lang=en

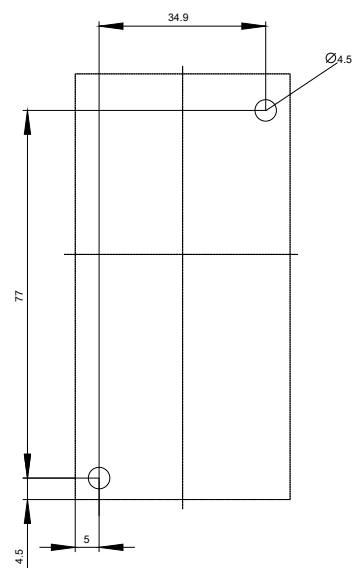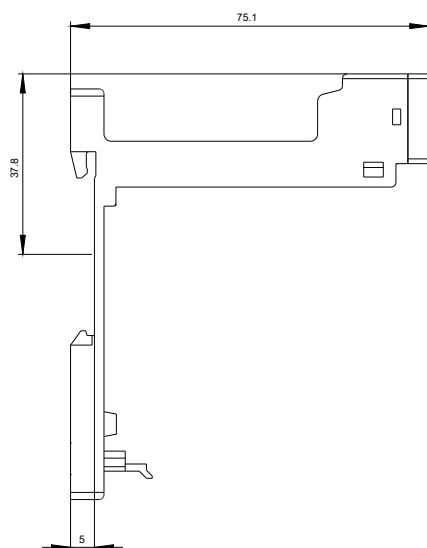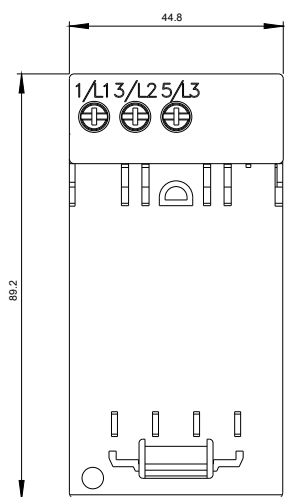

1/L1

3/L2

5/L3

last modified:

03/19/2020