

DS-K7M-AW24 Power Supply



- Power supply unit for access control terminal and lock, which can supply power for 1 access control terminal and 1 lock
- Input voltage 100 to 230 VAC, output voltage 12 VDC, output power 24 W
- MTBF(Mean Time Between Failure) > 200,000 hours
- Short-circuit, excess load, and over-voltage protection
- Storage battery available


▪ Specification

General	
Power supply	Power input: 110 to 230 VAC Power output: 12 VDC, 24 W
Power consumption	Power output: 24 W Momentary current: 5 A Persistent current: 2 A
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	< 95%
Dimensions	168 mm × 216 mm × 73.3 mm (6.6" × 8.5" × 2.9")

▪ Available Model

DS-K7M-AW24

▪ Dimension

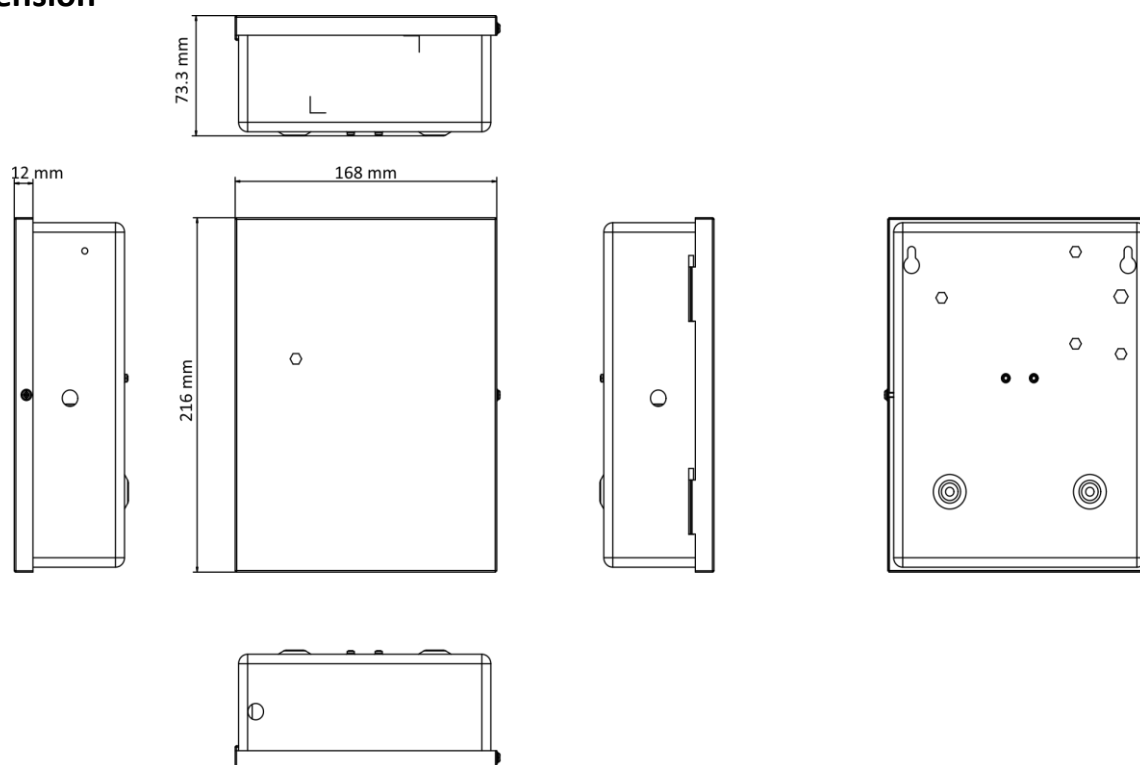

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq