


WALL MOUNT - UNIQUE CABLE MANAGEMENT

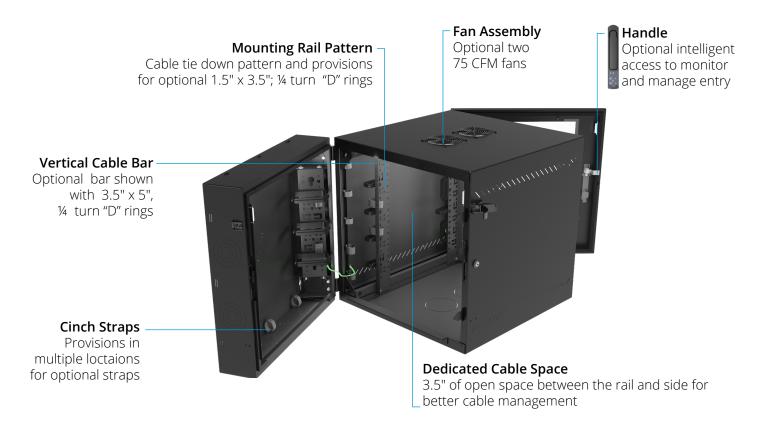

SEAL Security Ready. Add intelligent access to create a SEAL® solution!


Height	Door	Color	Handle	Airflow	Cable Management	Example
GLXXWMCM	X-	X-	XX-	XX-	XX-	Configured WMCM
24	P (Plexi)	B (Black)	SH (Swing Handle)	AF (Fan Included)	CM (Cable Bar Included)	GL24WMCMP-B-SH-AF-CM
36	M (Mesh)	W (White)	SC (SEAL Combo) ¹	00 (None)	00 (None)	
48	S (Solid)		SE (SEAL Electronic) ²			

¹4 Digit combination handle; ² Electronic handle SEAL-TLDA

FEATURES

- Two pair of #12-24 mounting rails (depth adjustable)
- · Offset mounting rails create dedicated cable management space between the rail and side
- · Nominal concentric conduit knockouts on top, bottom, and back of rear section
- 150mm x 25mm Standard door handle cutout
- · Reversible mounting for left-hand or right-hand opening
- · Standards: UL2416 Listed; RoHS II Compliant



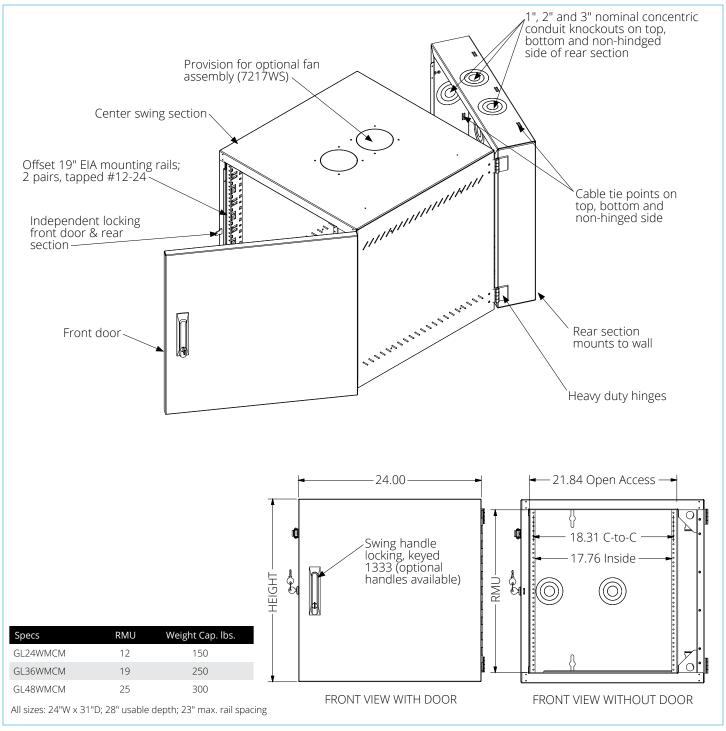

POPULAR ACCESSORIES

Part No.	Description		
CM-04	Horizontal cable organizer with five 3.5" x 5", ¼ turn "D" rings; 2 RMU		
CM-05	Horizontal cable organizer with five 1.5" x 3.5", ¼ turn "D" rings; 1 RMU		
CM-25	Kit of 10, ¼ turn "D" rings, 1.5" x 3.5"		
CM-26	Kit of 10, ¼ turn "D" rings, 3.5" x 5"		
7219	6 receptacles, 5-15R receptacle, 5-15P plug, 15 amp, 125V power strip for 19" mounting		
CBB-19	Copper Bus Bar for 19" mounting		

